




PALLET FORK WITH SIDE SHIFT AND FORK POSITIONER

PALLET FORK WITH SIDE SHIFT AND FORK POSITIONER

These series of pallet forks is equipped with hydraulic fork tines and separate side shift displacement of 260mm (2x130mm) independent of the position of the fork tines. Standard-equipped with chromed axle, bearings (Oilon), flow divider and an attachment connection. 3: rd and 4: th hydraulic function (or 3: rd hydraulic function plus an electrical valve). Delivered without hydraulic hoses to the machine.

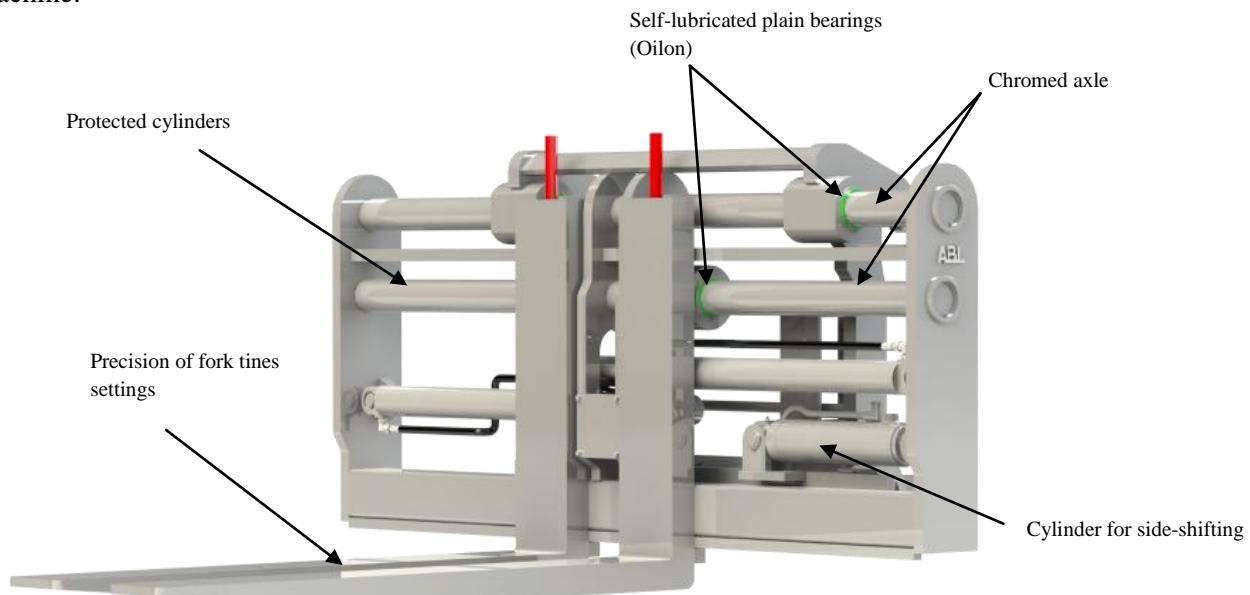

ABL CE, can in this range as standard offer pallet forks from **2.5tons to 16tons** and an attachment connection. Frame width between **1300mm to 2500mm**. The fork tines are **1200, 1400, 1500 or 1600** as standard. The capacity is by tp. 600mm.

Options

- Fixed attachment
- Wedge-attachment
- If you need a customized pallet fork, please ask for a quotation.

Advantages

- + No noise
- + Protected cylinders
- + Precision of fork tines settings
- + Self-lubricated plain bearings
- + Good sight

Please contact your nearest retailer or ABL Construction Equipment for more information or a quotation.

ABL Construction Equipment | Svetsargatan1 | 576 33 Sävsjö | Tel +46 382 67600 | info@abl.se | www.abl.se

