




# HYDRAULIC PALLET FORK

## PALLET FORK WITH HYDRAULIC FORK POSITIONER

A pallet fork with hydraulic adjustable tines which make it simpler to adjust the fork tines for various lifting needs. A high quality pallet fork with a robust frame for best durability and a measured design for best sight. As standard the pallet fork is equipped with a chrome axle, Oilon plain bearings, flow divider and a connection for an attachment.

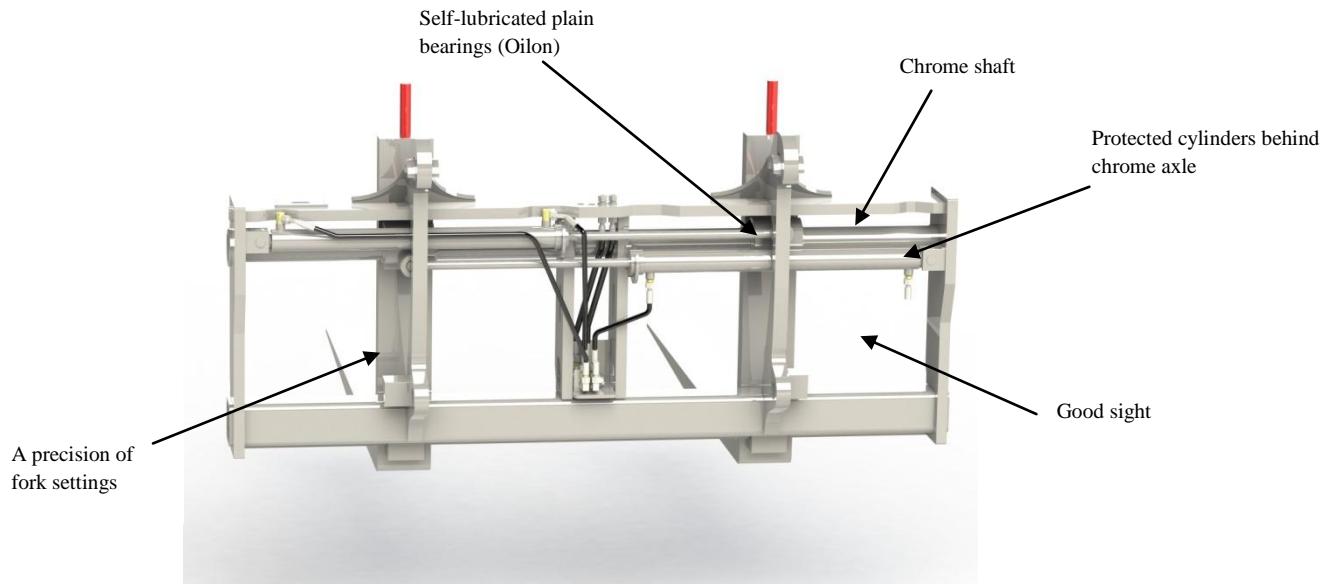

**ABL CE**, can in this range as standard offer a hydraulic pallet fork from 2,5tons to 20tons. Frame width between **1000mm** to **2500mm**. Length fork legs **1200mm, 1400mm, 1500mm** or **1600mm**. Connection for a quick coupler. The capacity of the pallet fork is by tp. 600mm.

### Options

- For a parallel run you need a valve and support rollers (3:rd hydraulic function)
- Fixed attachment
- Wedge attachment
- If you need a customized pallet fork, please ask for a quotation.

### Advantages

- + No noise
- + Protected cylinders
- + Precision of fork settings
- + Self-lubricated plain bearings on chrome axle
- + Good sight

**Please contact your closest retailer or ABL Construction Equipment for more information or a qoutation.**

ABL Construction Equipment | Svetsargatan1 | 576 33 Sävsjö | Tel +46 382 67600 | [info@abl.se](mailto:info@abl.se) | [www.abl.se](http://www.abl.se)

